



ASSEMBLY AND MOUNTING INSTRUCTIONS

GENERAL

- **WARNING-DISCONNECT POWER BEFORE RELAMPING OR WIRING THE FIXTURE. TURN OFF THE ENTIRE ELECTRICAL CIRCUIT TO WHICH THE LIGHTING FIXTURE IS ATTACHED**
- INSTALLATION AND MAINTENANCE OF THIS FIXTURE SHOULD BE COMPLETED BY A LICENSED ELECTRICIAN
- **FAILURE TO INSTALL FIXTURE CORRECTLY COULD RESULT IN SERIOUS INJURY OR DEATH**
- READ ALL INSTRUCTIONS BEFORE STARTING INSTALLATION.
- IF AN EXISTING FIXTURE IS BEING REPLACED, REMOVE IT AND NOTE TO WHICH WIRE IN THE OUTLET BOX THE ORIGINAL FIXTURE WAS ATTACHED.
- BEFORE DISCARDING THE CARTON DOUBLE CHECK THE PACKAGING TO MAKE SURE ALL PARTS HAVE BEEN FOUND.
- THIS FIXTURE WAS DESIGNED TO BE MOUNTED TO AN OCTAGON OUTLET BOX. THE BOX MUST BE SECURELY MOUNTED TO THE STRUCTURE OF THE BUILDING.

INSTALLATION

- STEP 1.** Remove the fixture and parts bag(s) from the carton.
- STEP 2.** Attach the mounting plate to the wall and mark the targets on the wall from the set holes. Remove the mounting plate.
- STEP 3.** Drill the holes and thread anchors into the holes.
- STEP 4.** Attach the mounting plate to the wall then thread the wall mounting screws through the set holes into the anchors,
- STEP 5.** Place Back plate over the mounting plate and secure with set screws.
- STEP 6.** Install the lamp(s). The fixture is rated for 25 watt type T lamp.
- STEP 7.** Plug cord into a qualified socket of properly rated voltage.
- STEP 8.** On/Off switch installed on cord.

DIMMING

The fixture can be controlled by a wall dimming device. Only use triac/electronic dimmer. Make sure carton is marked for use with LED compact fluorescent-incandescent light source only. These can be

provided by your local electrical distributor, home center, or hardware store.

CLEANING


Please clean with a soft, dry cloth ONLY! Do not use cleaning products.




mitzi
HUDSON VALLEY LIGHTING


HL263201, HL263202, HL263203, HOLLY SCONCE

ASSEMBLY AND MOUNTING DIAGRAM

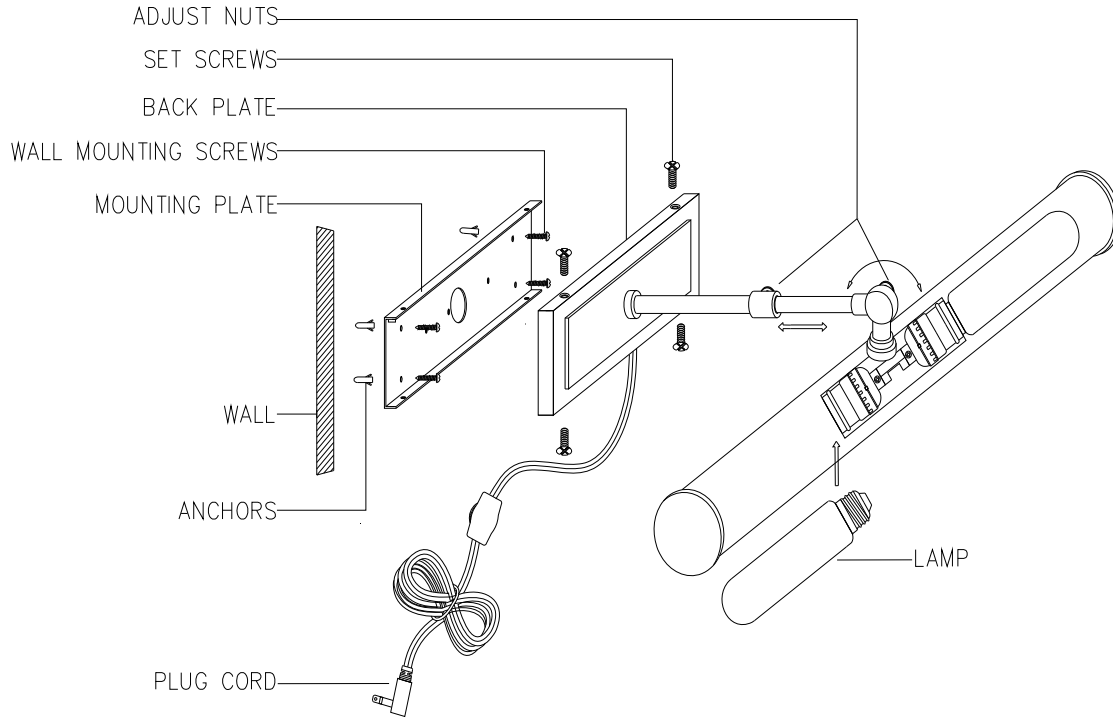

WIRE NUT/TAPING DIAGRAM

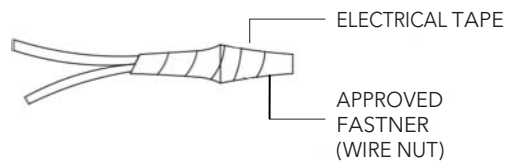



NOTICE D'ASSEMBLAGE ET DE MONTAGE

GENERALITÉ

- **AVERTISSEMENT - TOUJOURS DÉBRANCHER LA LAMPE À LA PRISE AFIN DE COUPER INTÉGRALEMENT LE CIRCUIT ÉLECTRIQUE AVANT D'INSTALLER, DE NETTOYER OU D'ENTREPRENDRE TOUT AUTRE ENTRETIEN.**
- **UNE INSTALLATION INCORRECTE DU DISPOSITIF PEUT ENTRAÎNER DES BLESSURES GRAVES OU LA MORT.**
- VEUILLEZ LIRE TOUTE LA NOTICE AVANT DE PROCÉDER À L'INSTALLATION.
- AVANT DE JETER LA BOÎTE D'EMBALLAGE, CONTRÔLER L'EMBALLAGE POUR S'ASSURER QUE TOUTES LES PIÈCES ONT ÉTÉ TROUVÉES.

INSTALLATION

- | | |
|--|--|
| PAS 1. Retirer le dispositif et le(s) sachet(s) avec accessoires du carton. | PAS 5. Placer la plaque arrière sur la plaque de montage et sécuriser celle-ci au moyen des vis de fixation. |
| PAS 2. Fixer la plaque de montage à la paroi et marquer l'emplacement voulu à partir des trous de fixation. Retirer la plaque de montage. | PAS 6. Installer l'ampoule. Le dispositif est prévu pour une ampoule de 25 watt de type T.
NE PAS DÉPASSER LE WATTAGE RECOMMANDÉ! |
| PAS 3. Percer les trous et faire passer les chevilles dans lesdits trous. | PAS 7. Brancher la fiche à une prise approuvée avec tension correctement évaluée. |
| PAS 4. Fixer la plaque de montage à la paroi et faire passer les vis de montage par les trous de fixation et dans les chevilles. | PAS 8. L'interrupteur est installé au cordon. |

NETTOYAGE

A nettoyer UNIQUEMENT avec un chiffon doux et sec! Ne pas utiliser de produits de nettoyage.

SCHÉMA D'ASSEMBLAGE ET DE MONTAGE



mitzi
HUDSON VALLEY LIGHTING

HL263201, HL263202, HL263203, HOLLY

