



LED Line Voltage Task Lighting NLL 8/14/22/32/40 Series

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Features

The NLL Series is ideal for undercabinet lighting in kitchens, study areas and displays with its low profile design. The housing is available in 5 different lengths ranging from 8" to 40" to handle most application requirements. Color options include a white and bronze finish as well as actual stainless steel to accommodate most decors. The NLL Series includes an array of LED diodes and is linkable up to 320 watts. In addition, the units can be direct wired. Unique hinged tempered glass and wiring compartment, as well as captive mounting screws, provide a smoother installation setup. Knockouts spaced every 4" on the top and bottom offers maximum wiring flexibility.



The following accessories are included with each fixture:

- 5' cord and plug • 12" connecting cable • BX/NM cable connector

Construction

Fixture housing is made from 22-gauge roll-formed steel. Metal enclosed hinged service tray allows for easy installation and locks into position with half-turn latch fasteners. Tempered glass panel is also hinged, allowing convenient access to the lamp compartment. Power connections are made inside the service tray or with included cord and plug.

Finish

All exposed metal parts are post painted lighting grade and available in the following finishes:


- White Gloss Enamel (WH) • Stainless Steel (SS) • Oil-Rubbed Bronze (RB)

Diffuser

The diffuser is made of clear tempered 1/8" thick glass with frosted interior surface.

Electrical

This unit is wired for 120V operation. LED driver has a 12VAC output to the LED light engine. High/low switch included. Electronic low voltage dimmers sold separately.

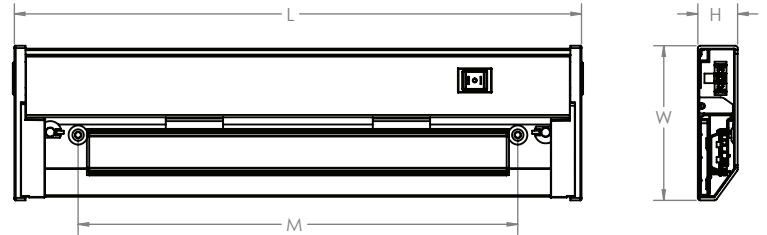

Lamping

LED lamping, type SMT array, 3000K nonreplaceable, rated 50,000 hrs.

Certification

Fixtures are cULus listed for damp locations and carry a UL rating for undercabinet/convertible/linkable mounting. ENERGY STAR® qualified.

Ordering Information:

LED Line Voltage Task Lighting

Use guide below to order complete fixture. Example: NLL320WH

NLL			LAMP		DIMENSIONS			
Oil-Rubbed Bronze	White	Stainless	LED	Lumens	H	W	L	M
NLL8RB	NLL8WH	NLL8SS	SMT-Array	85	1"	3-3/4"	8"	4-7/8"
NLL14RB	NLL14WH	NLL14SS	SMT-Array	150	1"	3-3/4"	14"	10-7/8"
NLL22RB	NLL22WH	NLL22SS	SMT-Array	260	1"	3-3/4"	22"	18-7/8"
NLL32RB	NLL32WH	NLL32SS	SMT-Array	350	1"	3-3/4"	32"	28-7/8"
NLL40RB	NLL40WH	NLL40SS	SMT-Array	425	1"	3-3/4"	40"	36-7/8"

For photometric information, consult factory.
Specifications and dimensions subject to change without notice.