Model number **Specifications**


Transformer (100-240 V; 50/60 Hz): Included - C-UL-US Certified

Energy Consumption: 7 watts Number of LEDs: 28 LEDs LED Rated Lifespan: 50,000 hours Color Temperature (Typical) - Cool: 4,500 K 3.500 K

Color Temperature (Typical) – Warm: Color Rendering Index (CRI): 85 Dimmer: Built-in touchstrip

Brightness Adjustability: Continuous Color Finish: Metallic Black, Silver Material: Aluminum/Plastic


Cord Color: Black Cord Length: 9'




Dimensions

Mounting options / Accessories (*optional)

Light source placed at 15" away from worksurface



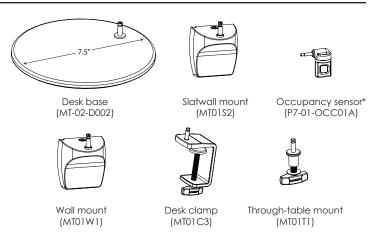

LEED credit eligibility

Photometrics

Energy & Atmosphere (EA)

Credit 1.1: Optimize Energy Performance LED lighting to reduce energy consumption. (Potential points: 3)

Innovation In Design (ID)

Credit 1.1-1.4: Innovation in Design

Z-Bar® Mini features the original Z-Bar®'s three-bar design for maximum reach and flexibility. The LED head can spin in its socket, sweep side to side, and rotate around the end of the arm to point in any direction. The lamp also features a built-in touchstrip for flicker-free touch sensitive dimming.

(Potential points: 4)

Materials & Resources (MR)

Credit 4.1: Recycled Content - 10%

Lamps contain parts made out of 10% pre-consumer recycled content. (Potential points: 1)

Credit 4.2: Recycled Content - 20%

Lamps contain parts made out of 20% pre-consumer recycled content. (Potential points: 2)

180 160 140 120 Brightness (fc) 100 80 60 40 20 0 15 18 21 Distance from center (in)

Environmental considerations

Lamp contains 61% preconsumer recycled material by weight* Aluminum housing is fully recyclable All color finishes use water-based paint All cardboard used in packaging is FSC certified LEDs do not contain mercury

*in standard configuration (includes transformer and weighted base)