


FUNDEMENTALS



FOUR CORNERS

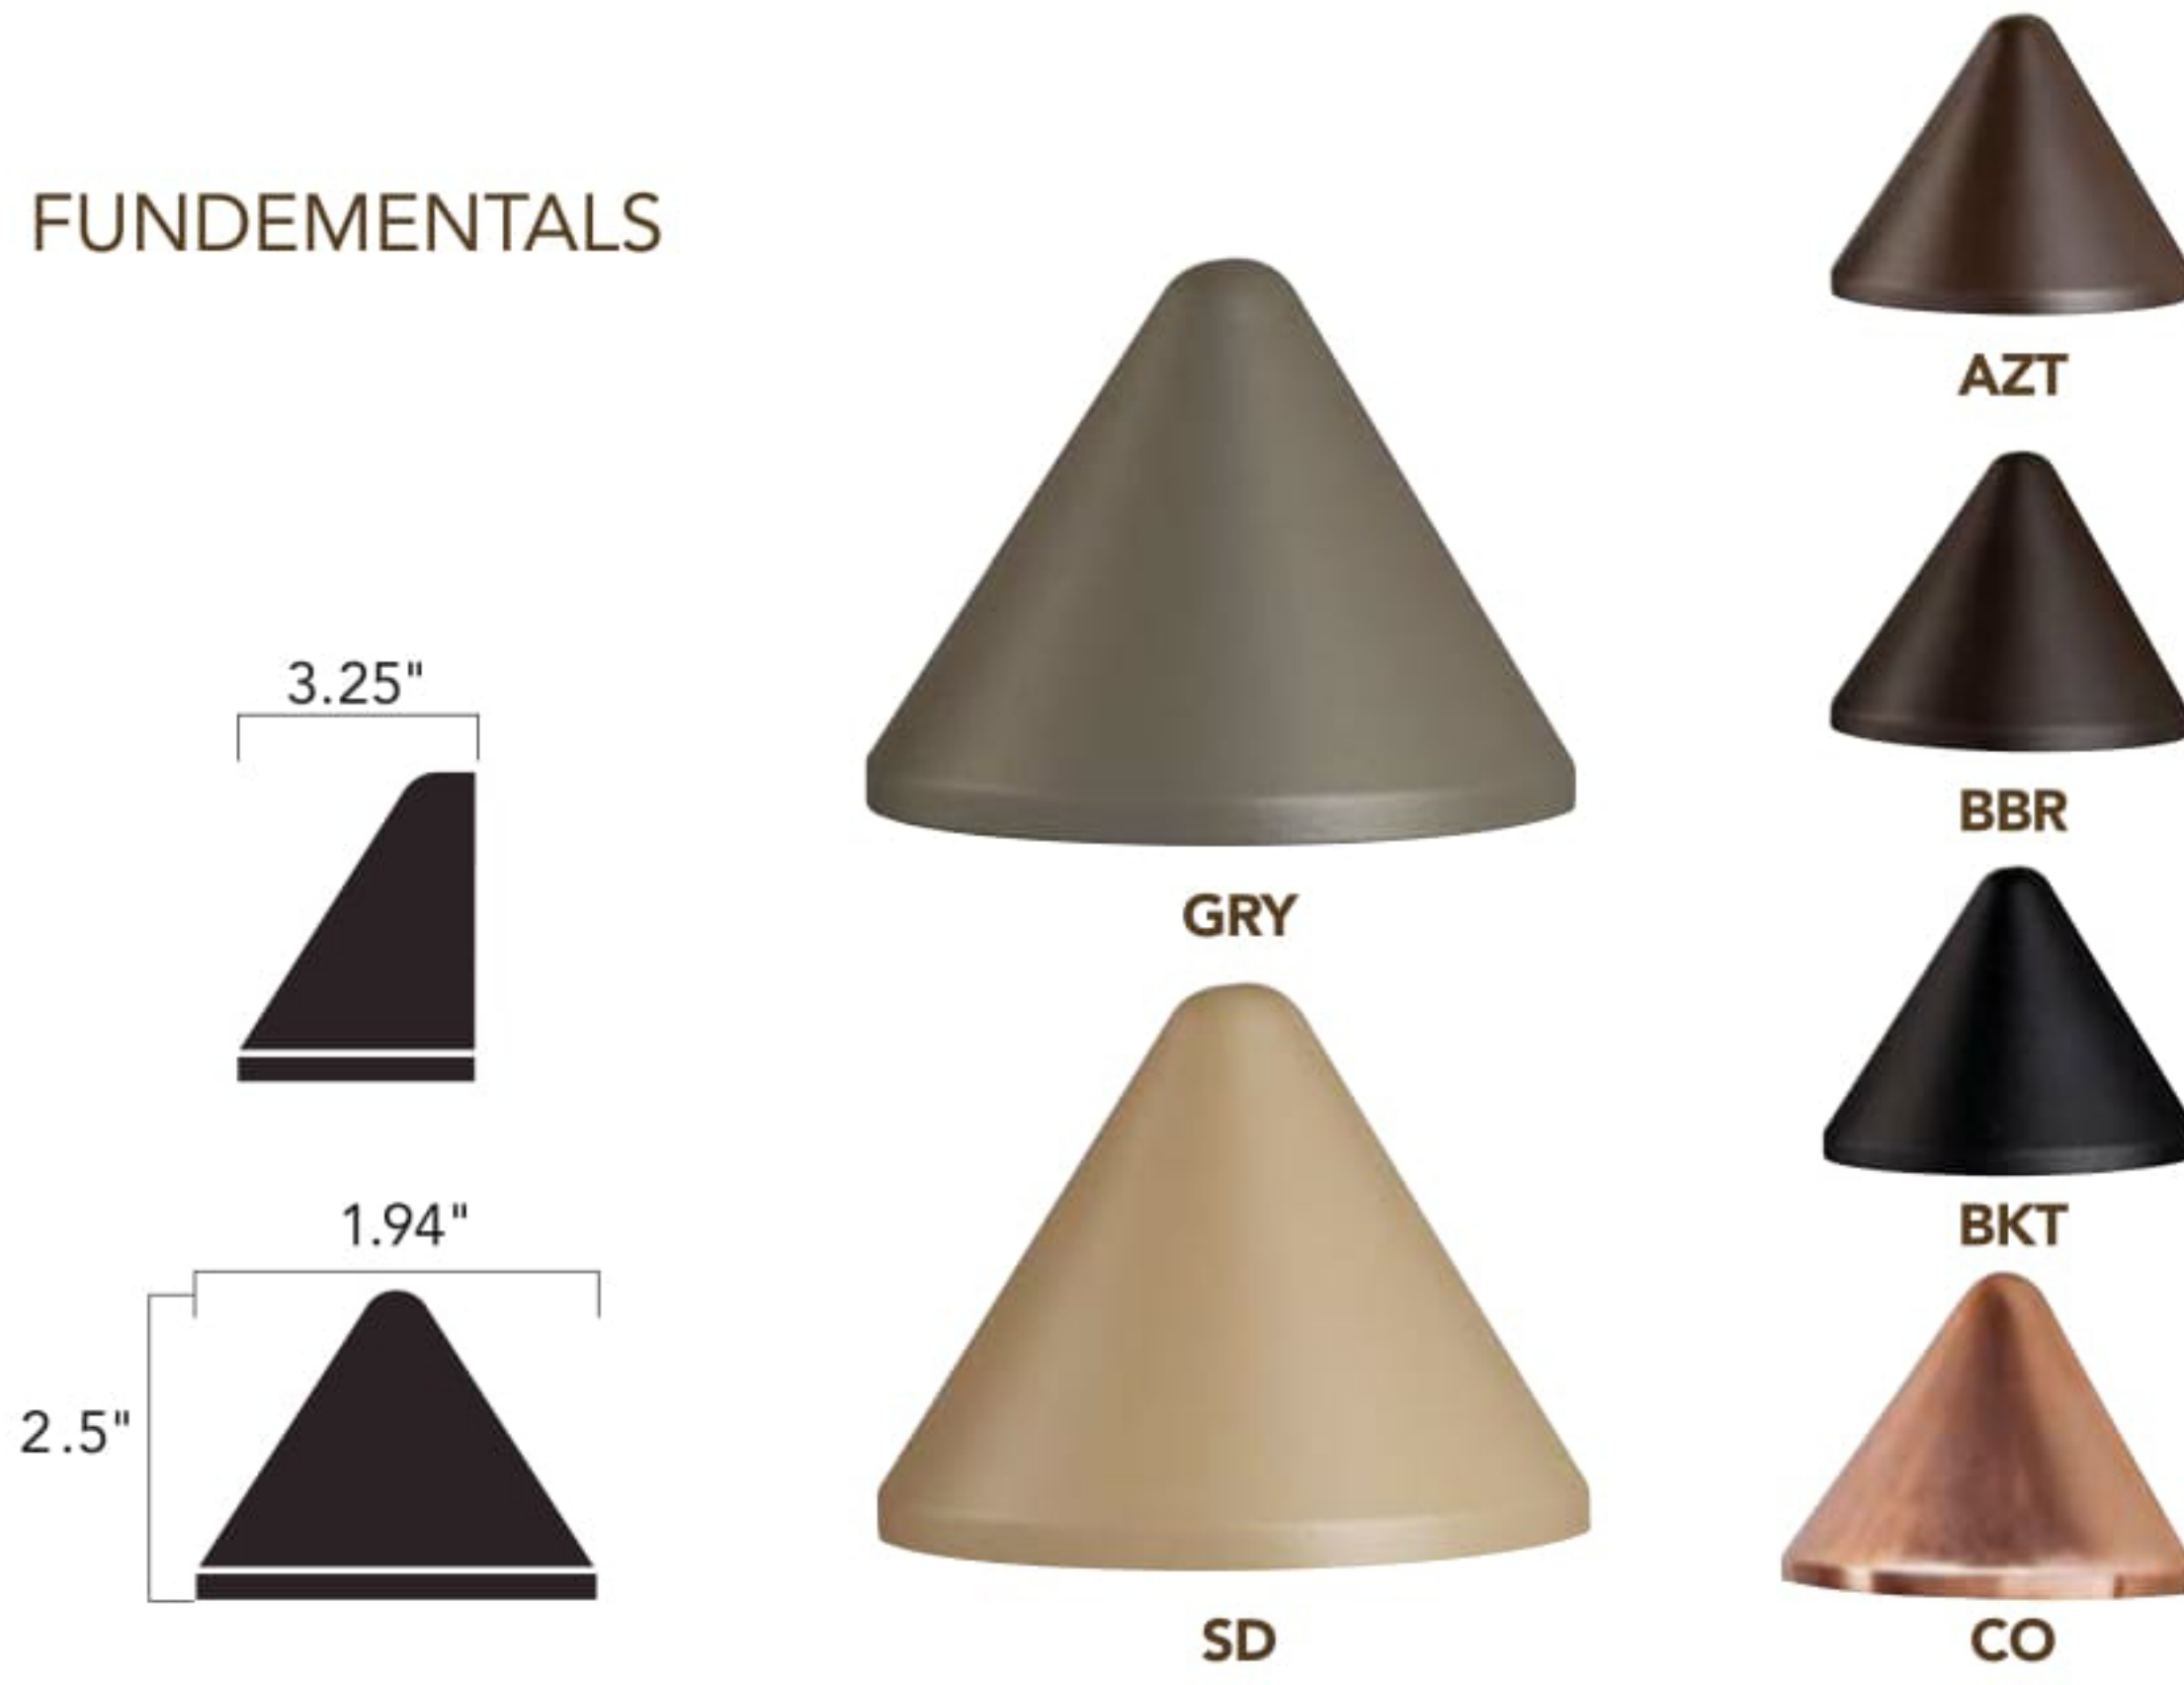

16110 AZT, BBR, BKT, CO, GRY, SD

16111 AZT, BKT, TZT

| | 2700K – Warm White | | 3000K – Pure White | | | | | |
|--|---|--|--|---|------|------|------|------|
| | 16110 AZT27 16110 BBR27 16110 BKT27 16110 CO27 16110 GRY27 16110 SD27 | 16110 AZT30 16110 BBR30 16110 BKT30 16110 CO30 16110 GRY30 16110 SD30 | 16111 AZT27 16111 BKT27 16111 TZT27 | 16111 AZT30 16111 BKT30 16111 TZT30 | | | | |
| Kelvin | 2700K – Warm White | | 3000K – Pure White | | | | | |
| Ordering Guide & Finish | 16110 AZT27 16110 BBR27 16110 BKT27 16110 CO27 16110 GRY27 16110 SD27 | | 16111 AZT27 16111 BKT27 16111 TZT27 | | | | | |
| Housing | Cast Aluminum or Cast Brass, Copper | | Cast Aluminum | | | | | |
| Light Source | 1 Integrated High Output Cree® LED, tightly binned for color uniformity, and constant current driver | | 1 Integrated High Output Cree® LED, tightly binned for color uniformity, and constant current driver | | | | | |
| Color Temp. (CCT) & CRI | 2700K (-50/+100) / 80s CRI 3000K (-45/+130) / 80s CRI | | 2700K (-50/+100) / 80s CRI 3000K (-45/+130) / 80s CRI | | | | | |
| Power Usage at 12V AC Input VA and Watts | .86 W, 1.86 VA | | .86 W, 1.86 VA | | | | | |
| Operating Voltage Range | 9V-15V AC/DC with no loss in output due to constant current technology | | 9V-15V AC/DC with no loss in output due to constant current technology | | | | | |
| Lumen Maint. | Tested to an L-70 of 40,000 hours | | Tested to an L-70 of 40,000 hours | | | | | |
| Delivered Lumens & Efficacy | 2700K = 43 Lm 2700K = 51 Lm/W | 3000K = 41 Lm 3000K = 50 Lm/W | 2700K = 43 Lm 2700K = 51 Lm/W | 3000K = 41 Lm 3000K = 50 Lm/W | | | | |
| Wiring | 72" of usable #18-2, SPT-1-W leads. Cable Connectors supplied. | | 72" of usable #18-2, SPT-1-W leads. Cable Connectors supplied. | | | | | |
| Mounting Access. (Included) | Stainless steel mounting bracket and hardware | | Stainless steel mounting bracket and hardware | | | | | |
| Notes | Coordinating Path Light on page 35. Copper and Brass will naturally patina over time. *Cree is a registered trademark of Cree, Inc. | | Coordinating Path Light on page 45. *Cree is a registered trademark of Cree, Inc. | | | | | |
| Fixture Photometric (fc)* | Mounting Light | 0' | .5' | 1' | 2' | 3' | 4' | 5' |
| | 6" | 76.50 | 20.00 | 3.00 | 0.20 | 0.06 | 0.05 | 0.03 |
| | 12" | 13.00 | 10.63 | 4.80 | 1.10 | 0.20 | 0.08 | 0.05 |
| | 30" | 3.20 | 3.40 | 2.60 | 1.20 | 0.52 | 0.24 | 0.12 |

*Values stated for 3000K. -10% for 2700K.