


FUNDEMENTALS



FOUR CORNERS

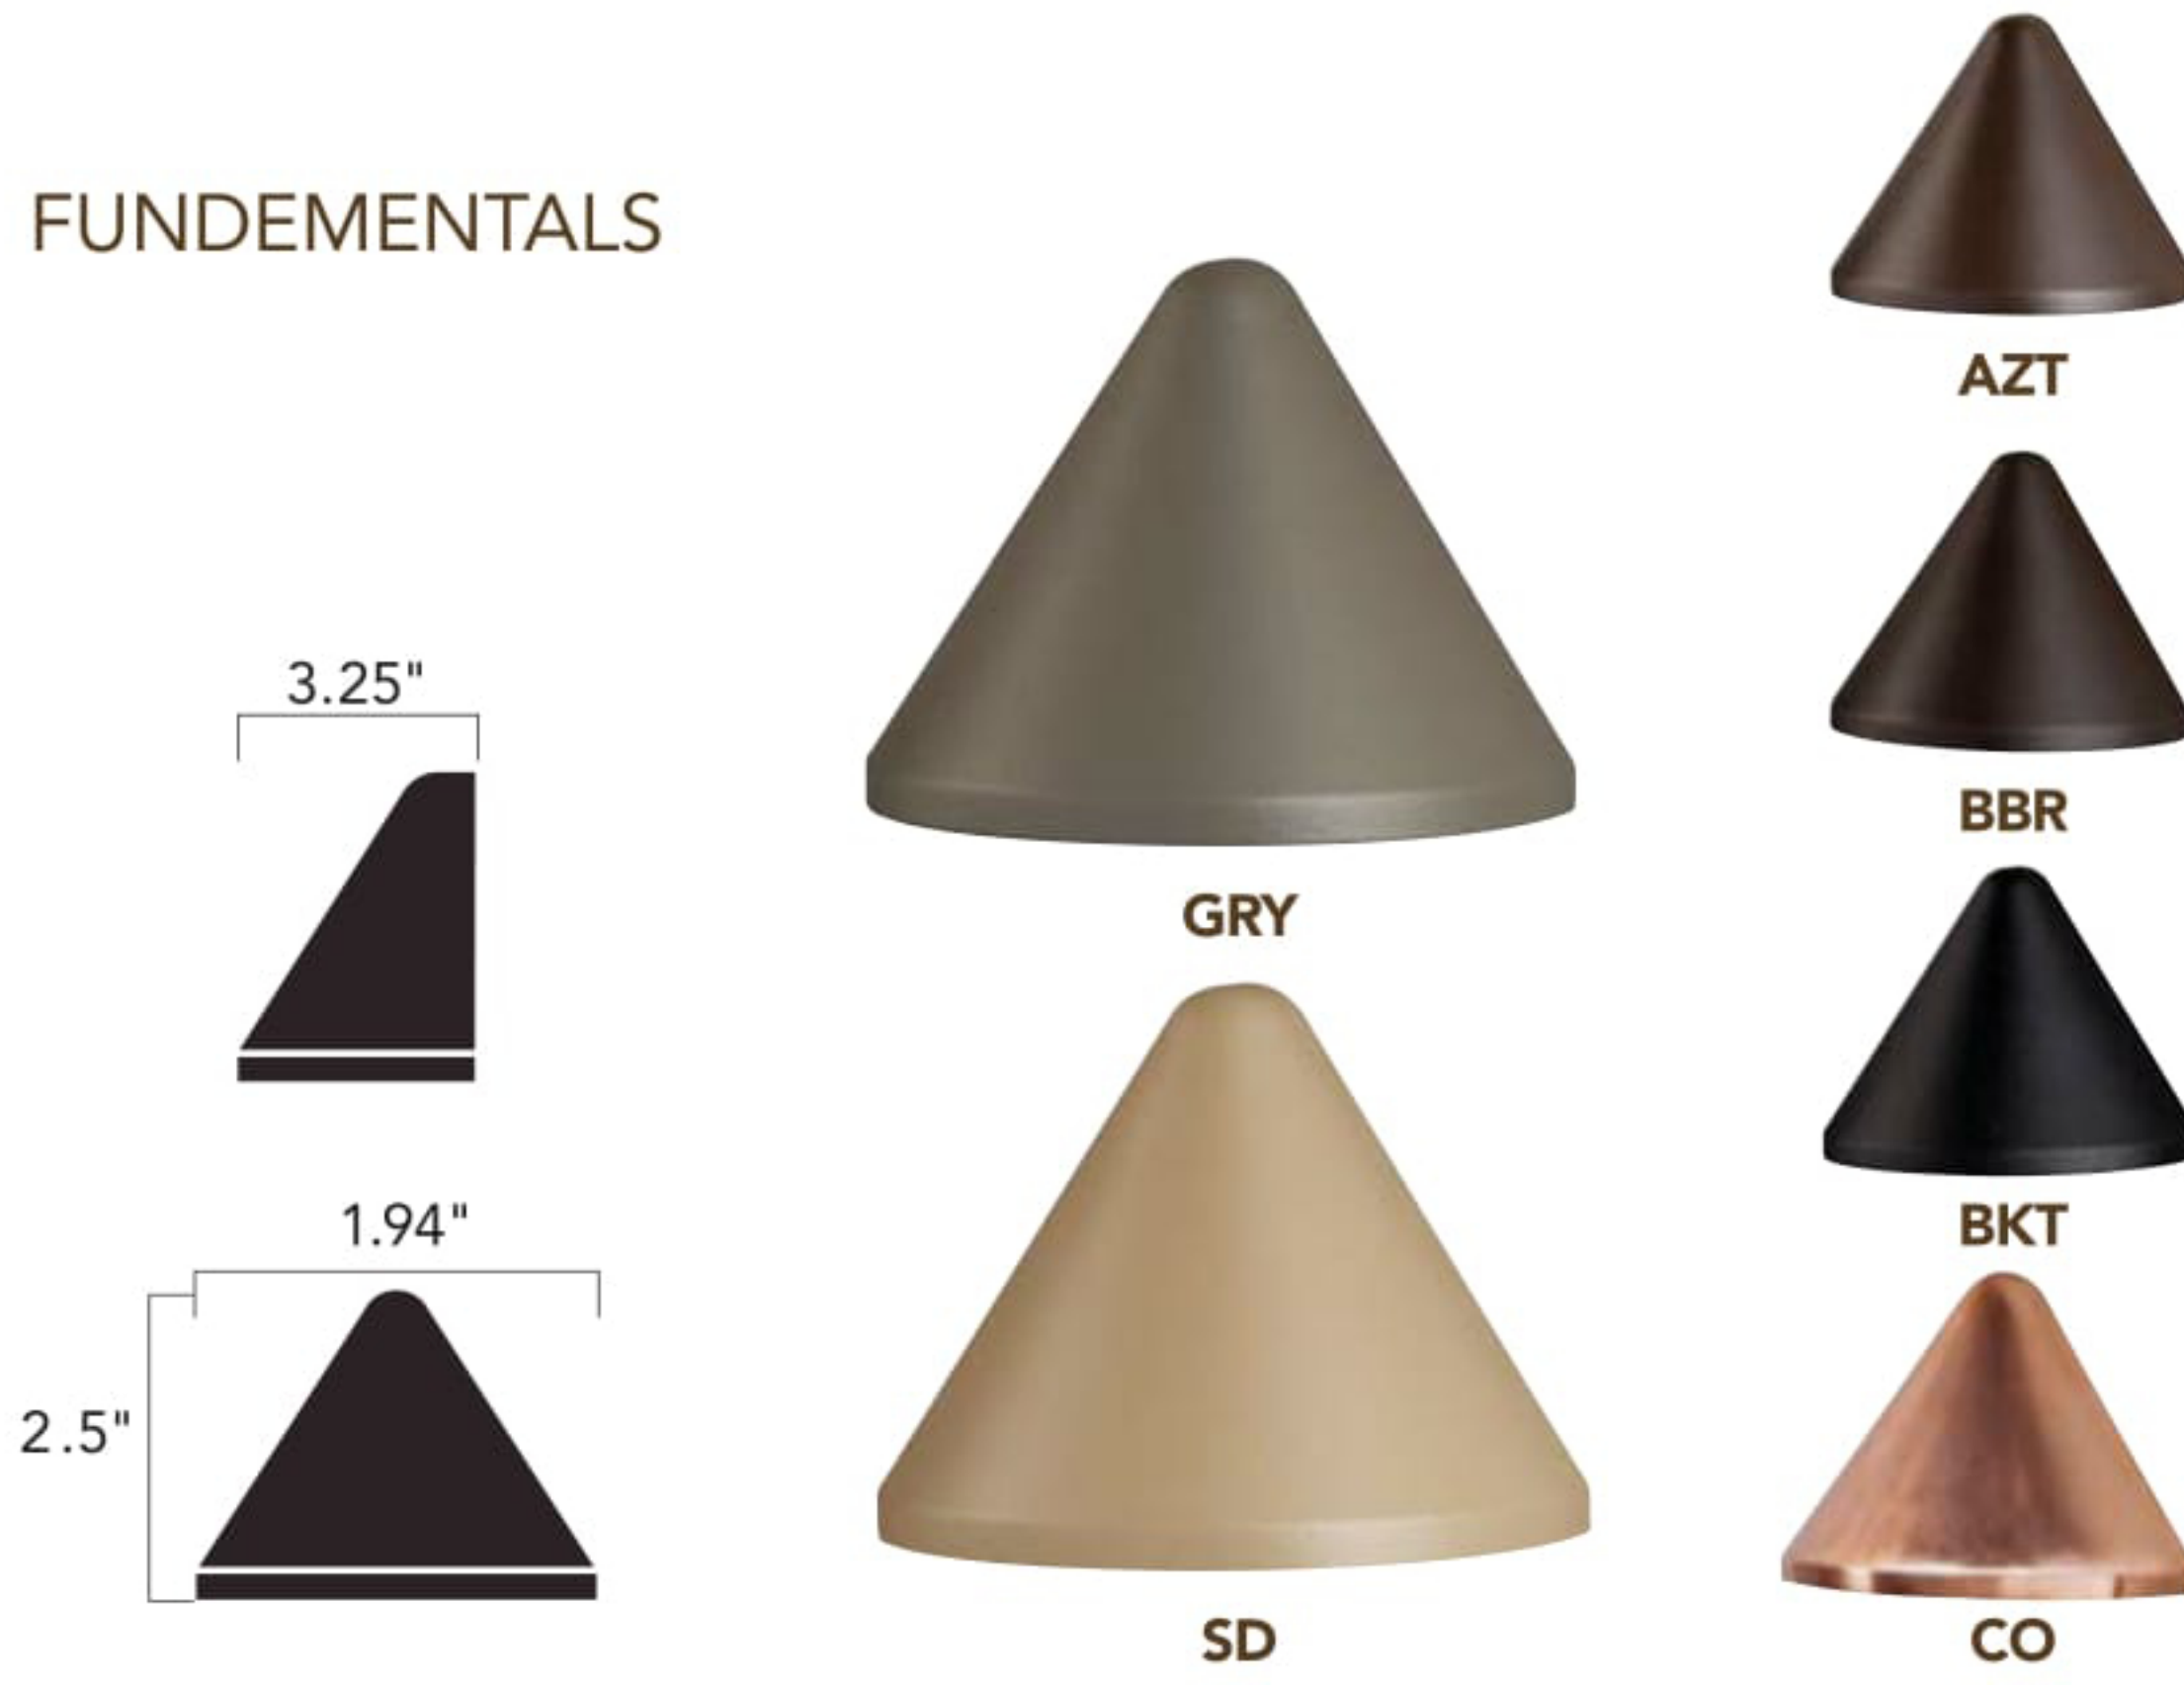

16110 AZT, BBR, BKT, CO, GRY, SD

16111 AZT, BKT, TZT

Kelvin	2700K – Warm White	3000K – Pure White	2700K – Warm White	3000K – Pure White												
Ordering Guide & Finish	16110 AZT27 16110 BBR27 16110 BKT27 16110 CO27 16110 GRY27 16110 SD27	16110 AZT30 16110 BBR30 16110 BKT30 16110 CO30 16110 GRY30 16110 SD30	16111 AZT27 16111 BKT27 16111 TZT27	16111 AZT30 16111 BKT30 16111 TZT30												
Housing	Cast Aluminum or Cast Brass, Copper		Cast Aluminum													
Light Source	1 Integrated High Output Cree® LED, tightly binned for color uniformity, and constant current driver		1 Integrated High Output Cree® LED, tightly binned for color uniformity, and constant current driver													
Color Temp. (CCT) & CRI	2700K (-50/+100) / 80s CRI 3000K (-45/+130) / 80s CRI		2700K (-50/+100) / 80s CRI 3000K (-45/+130) / 80s CRI													
Power Usage at 12V AC Input VA and Watts	.86 W, 1.86 VA		.86 W, 1.86 VA													
Operating Voltage Range	9V-15V AC/DC with no loss in output due to constant current technology		9V-15V AC/DC with no loss in output due to constant current technology													
Lumen Maint.	Tested to an L-70 of 40,000 hours		Tested to an L-70 of 40,000 hours													
Delivered Lumens & Efficacy	2700K = 43 Lm 2700K = 51 Lm/W	3000K = 41 Lm 3000K = 50 Lm/W	2700K = 43 Lm 2700K = 51 Lm/W	3000K = 41 Lm 3000K = 50 Lm/W												
Wiring	72" of usable #18-2, SPT-1-W leads. Cable Connectors supplied.		72" of usable #18-2, SPT-1-W leads. Cable Connectors supplied.													
Mounting Access. (Included)	Stainless steel mounting bracket and hardware		Stainless steel mounting bracket and hardware													
Notes	Coordinating Path Light on page 35. Copper and Brass will naturally patina over time. *Cree is a registered trademark of Cree, Inc.		Coordinating Path Light on page 45. *Cree is a registered trademark of Cree, Inc.													
Fixture Photometric (fc)*	Mounting Light	0'	.5'	1'	2'	3'	4'	5'	Mounting Light	0'	.5'	1'	2'	3'	4'	5'
	6"	76.50	20.00	3.00	0.20	0.06	0.05	0.03	6"	76.50	20.00	3.00	0.20	0.06	0.05	0.03
	12"	13.00	10.63	4.80	1.10	0.20	0.08	0.05	12"	13.00	10.63	4.80	1.10	0.20	0.08	0.05
	30"	3.20	3.40	2.60	1.20	0.52	0.24	0.12	30"	3.20	3.40	2.60	1.20	0.52	0.24	0.12

*Values stated for 3000K. -10% for 2700K.