



# 12V LED PATH & SPREAD

## PERFORATED

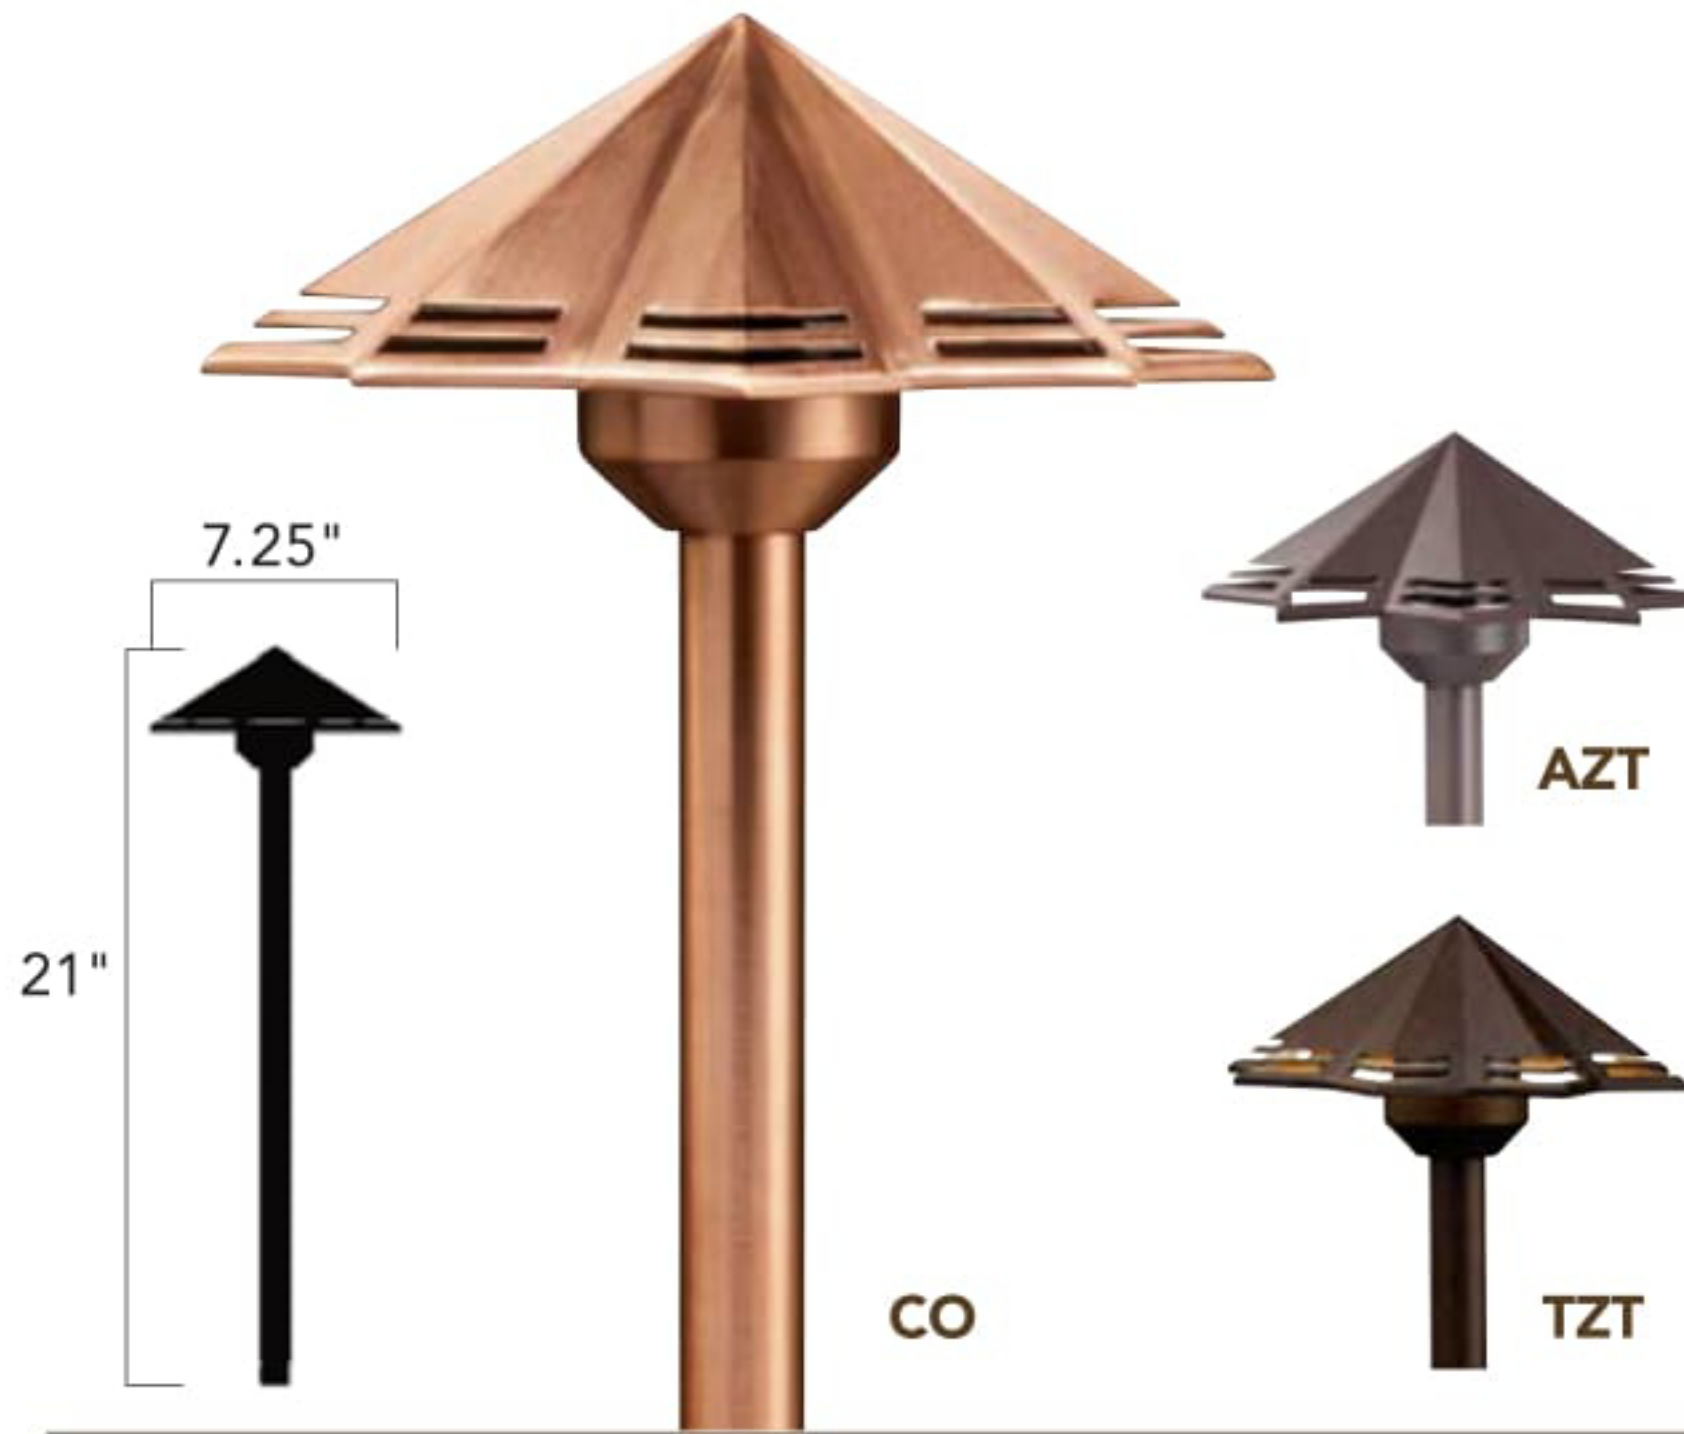

**16123 AZT, CO, TZT**

## ROUND TIERED

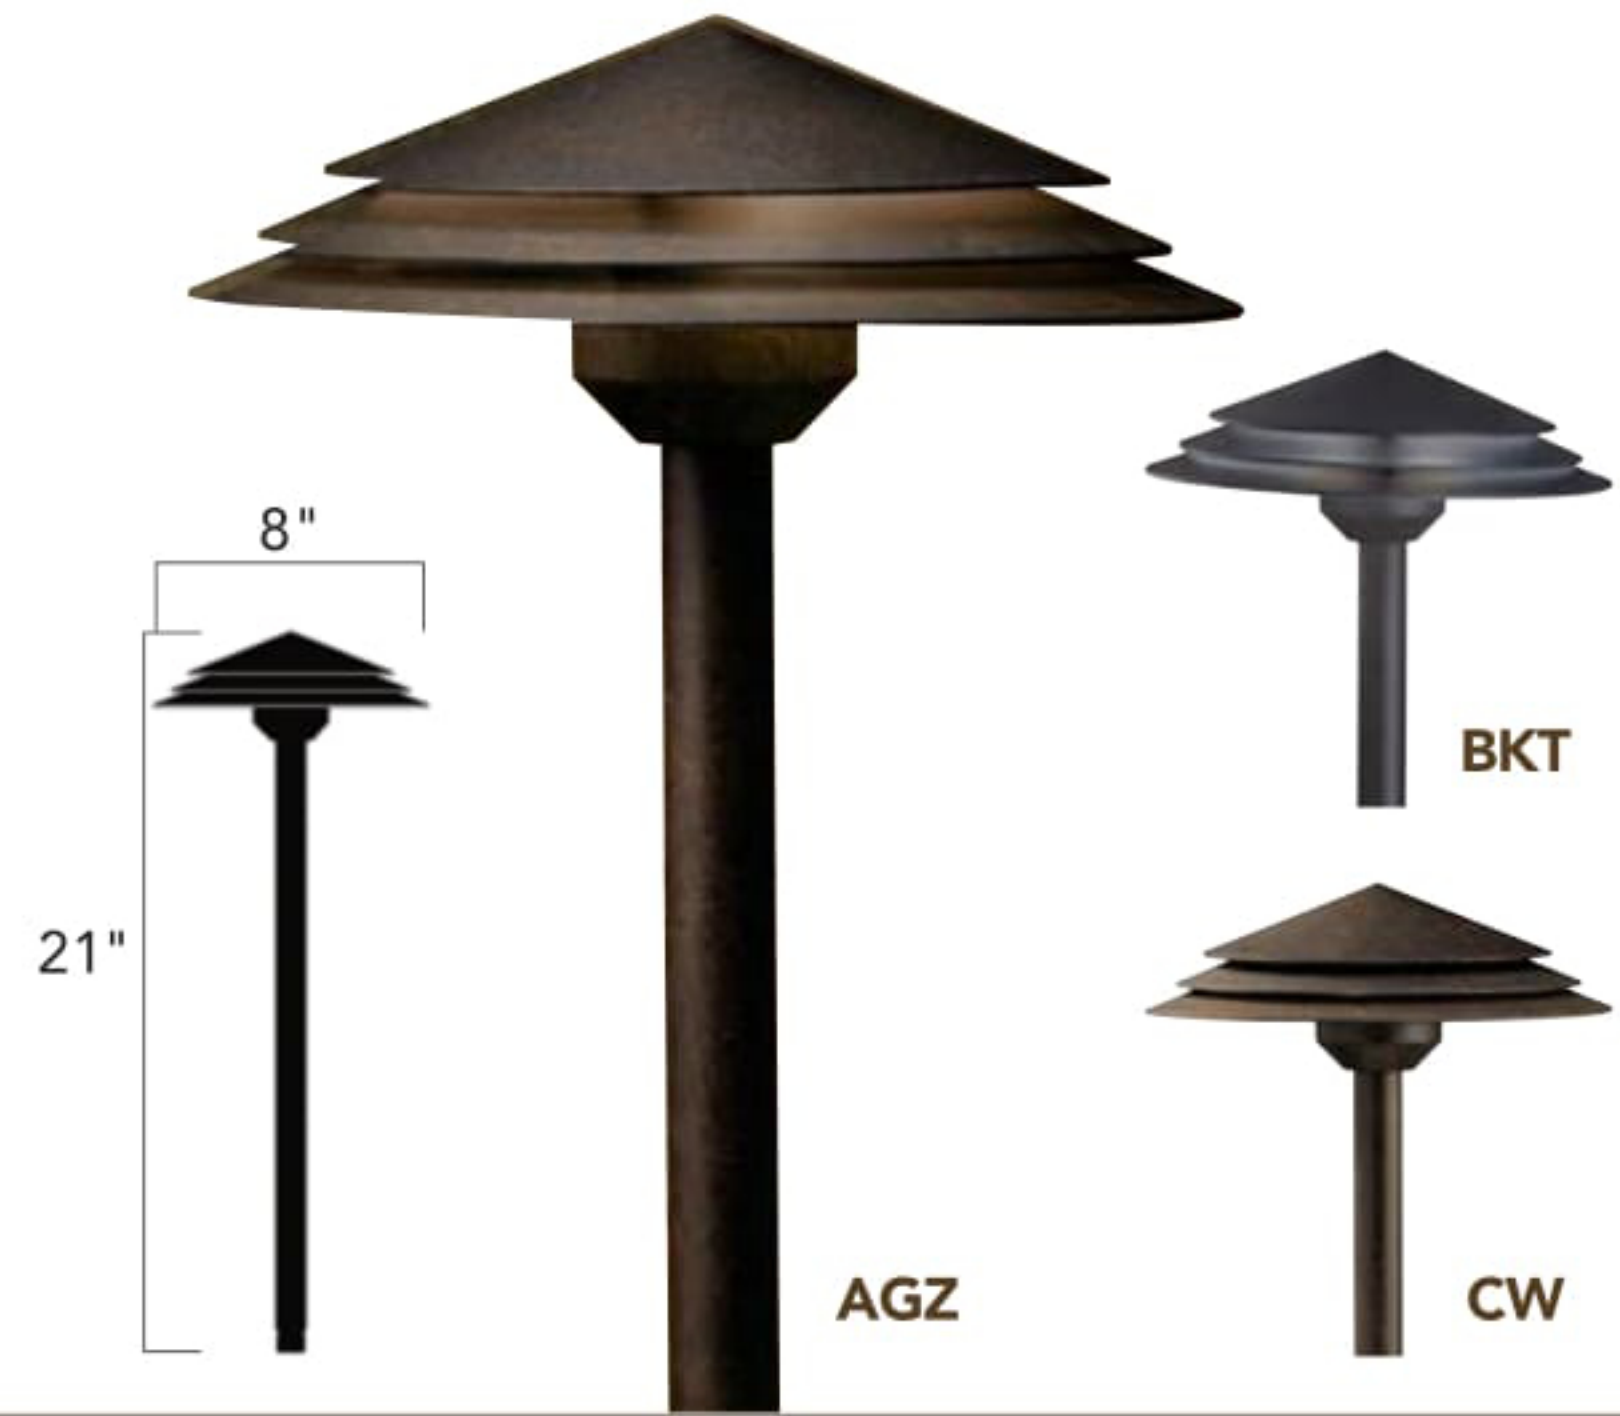

**16124 AGZ, BKT, CW**

	2700K – Warm White		3000K – Pure White		2700K – Warm White		3000K – Pure White													
Kelvin	2700K – Warm White		3000K – Pure White		2700K – Warm White		3000K – Pure White													
Ordering Guide & Finish	16123 AZT27 16123 CO27 16123 TZT27		16123 AZT30 16123 CO30 16123 TZT30		16124 AGZ27 16124 BKT27 16124 CW27		16124 AGZ30 16124 BKT30 16124 CW30													
Housing	Aluminum, Copper				Aluminum															
Light Source	3 Integrated High Output Nichia® LEDs, tightly binned for color uniformity, and constant current driver				3 Integrated High Output Nichia® LEDs, tightly binned for color uniformity, and constant current driver															
Color Temp. (CCT) & CRI	2700K (-54/+89) / 80s CRI 3000K (-52/+122) / 80s CRI				2700K (-54/+89) / 80s CRI 3000K (-52/+122) / 80s CRI															
Power Usage at 12V AC Input VA and Watts	3.8 W, 4.95 VA				3.8 W, 4.95 VA															
Operating Voltage Range	9V-15V AC/DC with no loss in output due to constant current technology				9V-15V AC/DC with no loss in output due to constant current technology															
Lumen Maint.	Tested to an L-70 of 40,000 hours				Tested to an L-70 of 40,000 hours															
Delivered Lumens & Efficacy	2700K = 168 Lm 2700K = 46 Lm/W		3000K = 182 Lm 3000K = 46 Lm/W		2700K = 168 Lm 2700K = 46 Lm/W		3000K = 182 Lm 3000K = 46 Lm/W													
Wiring	30" of usable #18-2, SPT-1-W leads. Cable connectors supplied.				30" of usable #18-2, SPT-1-W leads. Cable connectors supplied.															
Mounting Access. (Included)	8" slotted in-ground stake				8" slotted in-ground stake															
Optional Accessories	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket				15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket															
Incandescent	N/A				N/A															
Notes	Copper will naturally patina over time. Coordinating deck light on page 56.				N/A															
Fixture Photometric (fc)*	Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'	Distance from Light	0'	1'	2'	3'	4'	5'	6'	7'	8'
	Footcandles	10.00	6.60	1.90	0.30	0.10	0.04	0.02	0.01	0.01	Footcandles	7.40	4.30	1.20	0.21	0.16	0.14	0.07	0.03	0.03

\*Values stated for 3000K. -10% for 2700K.