

ASSEMBLY AND INSTALLATION INSTRUCTIONS FOR ITEM

#92-MB/#92-BN/#92-NAB

WARNING:


TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Should any difficulty be experienced, please consult a qualified electrician before installing.

Installation Step :

1. Turn off the electricity at the fuse or Circuit Breaker before installation.
2. Attach the Round Bar to the Outlet Box by using 2PCS of Mounting Screws -2 upwards.
3. Thread the Loop to the Nipple.
4. Choose a certain length of the Chain you need, and weave the Fixture Wire and the Ground Wire through the Chain links, then attached one of the Adjustable Chain Link to the Top Loop and the other one to the Loop.
5. Weave the fixture wire and the Ground Wire through the Loop, Adjustable Chain Link, Chain, Canopy, and the Round Bar in order.
6. Make wire connections with Wire Connectors:
 - Connect the Wire (W/ marking) from the light to the Black Wire from the Outlet Box.
 - Connect the Wire (W/O marking) from the light to the White Wire from the Outlet Box.
 - Attached the Ground Wire and House Ground Wire to the Round Bar with a Green Screw.

Carefully tuck wires back into the Outlet Box.
7. Raise up the fixture and insert the 2PCS of Short Mounting Screws-1 into the canopy and tighten with the fixing nuts.
8. Attached Glass (suitable for Glass# 4350/#4352/#4490/#4492/#4460/#4462/#4250/#4252/#4253) to the Glass Holder and secure with the Plastic Ring and the Socket Ring.
9. Install bulb (Bulb is not included, please do not exceed the maximum capacity which is recommended on the Socket Ring.)
10. Turn on the power at Fuse or Circuit Box and enjoy your new fixture.

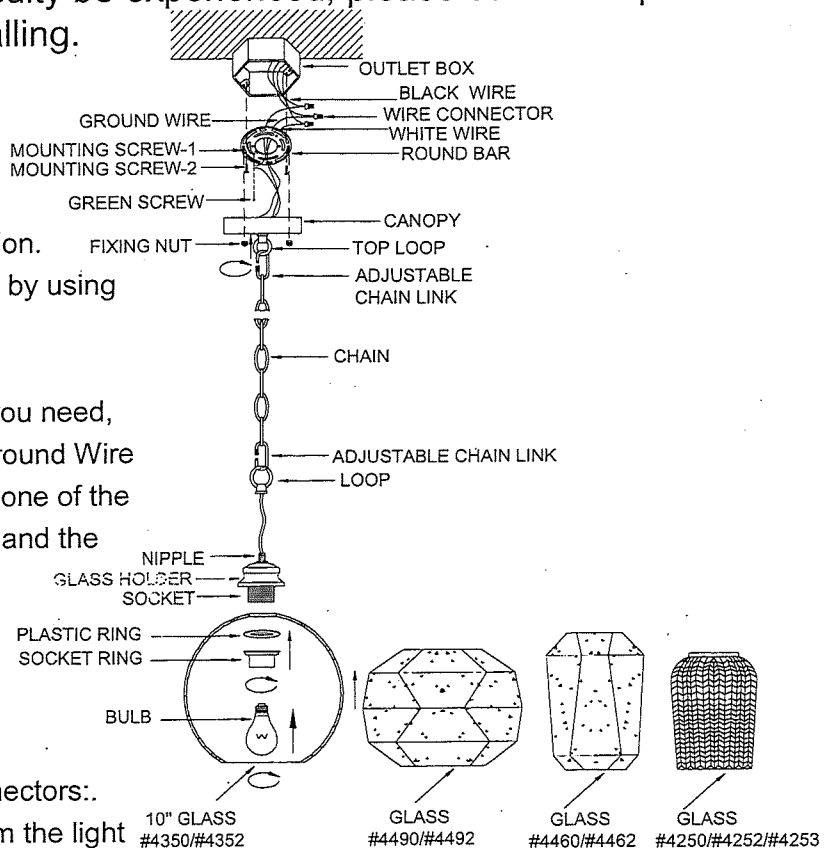

TOLTEC
-LIGHTING-