


HAIKU OUTDOOR

THE CEILING FAN, REINVENTED



Airfoil Finishes

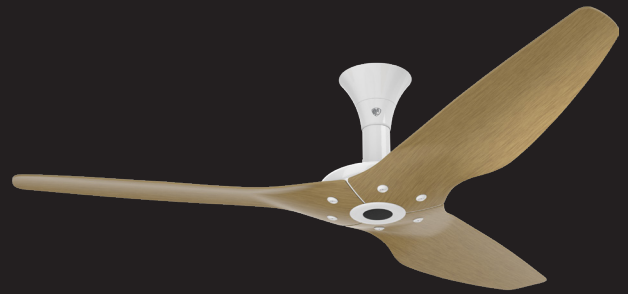

Hardware Finishes



Construction Features						
Airfoils	Motor	Controls	Components	Mounting	Environment ¹	Accessories
Aircraft-grade aluminum	High-efficiency, brushless DC/EC motor	Handheld remote with seven distinct speeds, plus Sleep, Timer, and Whoosh® modes 0–10 V (optional)	Made from stainless steel for protection against moisture	Flat or sloped ceilings 8 ft (2.4 m) or taller	IPX2 Covered outdoor use	Haiku Light Kit 0–10 V Module Optional extension tube lengths and a Stabilizer Kit are available for ceilings over 14 ft (4.3 m)

Ordering Information							
Diameter	Mount	Motor	Country	Power	Motor Finish	Airfoil Finish	
52 inch: FR127A 60 inch: FR150A 84 inch: FR213A	Low Profile: S0 Standard: A2 Universal: U0	52 in: F1 60 in: F1 84 in: G1	North America: 0-3H03 Europe: 1-3H03	52	Low Profile: 00 Standard: 02 Universal: 02	Black: 258 White: 259 Satin Nickel: 470 Oil-Rubbed Bronze: 471	Caramel: 504P010 Cocoa: 654P010 Black: 258P010 White: 259P010 Brushed Aluminum: 531P010 Satin Nickel: 470P010 Oil-Rubbed Bronze: 471P010
				60	Low Profile: 00 Standard: 02 Universal: 02		
				84	Universal: 04		

Haiku Light Kit



Remote



Handheld remote



Remote with mount

¹ Covered outdoor use only. Not suitable for salt air environments.

Lead times may vary.
Warranty period and terms vary by country and application.



USA
BIGASSFANS.COM
877-244-3267

CANADA
BIGASSFANS.COM
844-924-4277


AUSTRALIA
BIGASSFANS.COM/AU
1300 244 277

SINGAPORE
BIGASSFANS.COM/SG
65 6709 8500


MALAYSIA
BIGASSFANS.COM/SG
603 5565 0888

HAIKU OUTDOOR

THE CEILING FAN, REINVENTED

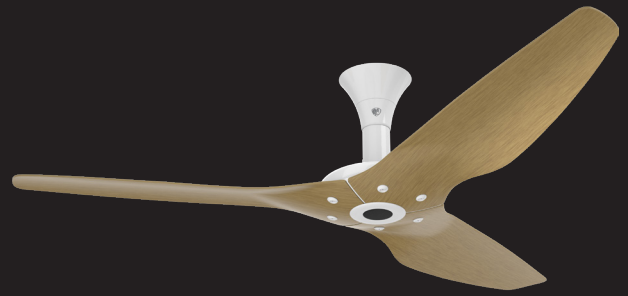


Low Profile Mount




Flat ceilings as low as 8 ft (2.4 m)

Standard Mount

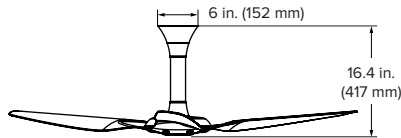

Flat ceilings from 8.5–11 ft (2.5–3.4 m)

Universal Mount

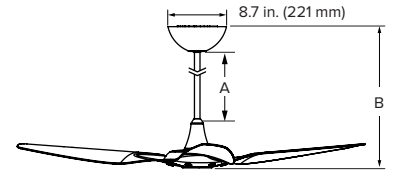

Sloped or flat ceilings from 9–18 ft (2.9–5.5 m)

Universal Mount Downrod Lengths

Downrod (A) ¹	Included		Optional	
		20 in. (508 mm)	32 in. (813 mm)	48 in. (1219 mm)
Fan Height (B) ²	29 in. (737 mm)	41 in. (1041 mm)	57 in. (1448 mm)	69 in. (1753 mm)
Ceiling Height	9.5–11 ft (2.9–3.4 m)	11–13 ft (3.4–4 m)	13–14 ft (4–4.3 m)	>14 ft (>4.3 m)

Aluminum Fan Specifications

Diameter	Mount	Weight ³	Max Speed	Airflow Min/Max	Watts Min/Max	Operating Voltage	Ambient Operational Temperature	Sound Level ⁴
52 in. (127 cm)	Low Profile	16.5 lb (7.5 kg)	179 RPM	1,161 / 4,565 cfm	2.2 / 15.4 W	100–240 VAC, 1 Φ, 50–60 Hz	32° to 104° F (0° to 40° C)	<35 dba at max speed
	Standard	16.5 lb (7.5 kg)	200 RPM	1,283 / 6,207 cfm	2.3 / 21.7 W			
	Universal	15.5 lb (7 kg)	200 RPM	1,283 / 6,207 cfm	2.3 / 21.7 W			
60 in (150 cm)	Low Profile	18.5 lb (8.4 kg)	177 RPM	1,107 / 7,957 cfm	1.6 / 31.4 W			
	Standard	18.5 lb (8.4 kg)	200 RPM	1,099 / 8,534 cfm	2.8 / 30.5 W			
	Universal	17.5 lb (8 kg)	200 RPM	1,099 / 8,534 cfm	2.8 / 30.5 W			
84 in. (213 cm)	Universal	26 lb (11.8 kg)	135 RPM	5,672 / 17,546 cfm	3.7 / 56.1 W			



¹ Optional downrod lengths packaged separately. Add 0.8 in. (20 mm) for 84-inch (2134 mm) diameter fans.
² Fan heights do not include the Haiku Light Kit.
³ The precise fan weights will vary based on individual component weights and finishing.
⁴ Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions.

Lead times may vary.
 Warranty period and terms vary by country and application.



USA
 BIGASSFANS.COM
 877-244-3267

CANADA
 BIGASSFANS.COM
 844-924-4277

AUSTRALIA
 BIGASSFANS.COM/AU
 1300 244 277

SINGAPORE
 BIGASSFANS.COM/SG
 65 6709 8500

MALAYSIA
 BIGASSFANS.COM/SG
 603 5565 0888