

1500 Cherokee Parkway, Suite 100, Acworth, GA 30102 P: 866-845-5451 • F: 866-816-6165

E: service@acclaim-lighting.com • www.acclaim-lighting.com

INTERIOR • OUTDOOR

# IN40090 INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

### **CAUTION**

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

#### **GENERAL**

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

## ASSEMBLY AND INSTALLATION

- 1. Secure the mounting plate (6) to the outlet box (1) with mounting screw (8).
- 2. Pull out the outlet wire and ground wire from the outlet box (1). Make wire connections.
- --Ribbed wire (w/o marking) from light to White wire (2) from power source.
- --Smooth wire (w/o marking) from light to Black wire (4) from power source.
- --Loop the ground wire (3) to mounting plate (6) with a ground screw (7).
- 3. Attach the back plate (10) against the outlet box (1), secure with the screws (9).
- 4. Slide the glass shade (13) over the socket cap (11) and secure with the knob (12).
- 5. Install bulbs: (bulbs not included)

(Do not exceed the maximum capacity recommended on the sockets).

#### INSTALLATION IS NOW COMPLETE

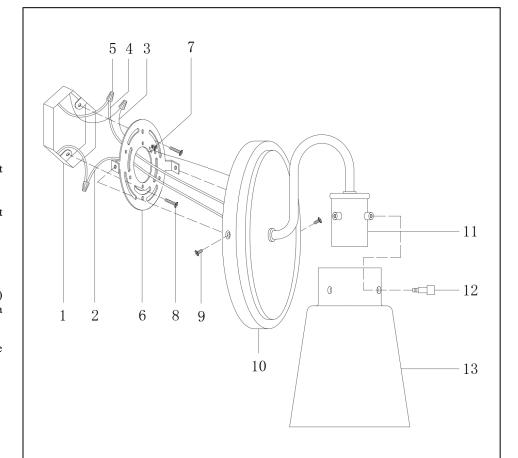

- 1. OUTLET BOX
- 2. WHITE WIRE
- 3. GROUND WIRE
- 4. BLACK WIRE
- 5. WIRE CONNECTOR
- 6. MOUNTING PLATE
- 7. GROUND SCREW

- 8. MOUNTING SCREW
- 9. SCREWS
- 10. BACK PLATE
- 11 SOCKET CAP
- 12. KNOB
- 13. GLASS SHADE